





CHASSIS	IVECO Eurocargo	MAN TGL	MAN TGM	MB Atego
Insulated, soundproof engine compartment cover	•	•	•	•
Turbo-diesel engine with rear-wheel drive and twin tyres	•	•	•	•
Automated 6-speed gearbox (12-speed with MAN 6 cylinder engine, 8 speed with MB Atego)	•	•	•	•
Differential lock for rear axle	•	•	•	•
Traction control system (TCS)	•	•	•	•
Air suspension for front axle (Iveco from 9 t, MB Atego from 12 t)	•	-	-	•
Air suspension rear axle with "raise and lower" function	•	•	•	•
Tyres for up to 10 tonne chassis	245 / 70R17.5	235 / 75R17.5	-	235 / 75R17.5
Tyres for 12 tonne chassis	285 / 70R17.5	245 / 75R17.5	-	265 / 70R19.5
Tyres for 15 tonne chassis	-	-	285 / 70R19.5	285 / 70R19.5
Rear-axle tyres with traction profile (M+S)	•	•	•	•
Disc brakes on front and rear axle	•	•	•	•
Dual-circuit compressed air brake	•	•	•	•
Electronically controlled anti-lock braking system (ABS)	•	•	•	•
ESP	•	•	•	•
Engine brake	•	•	•	•
Cruise control	•	•	•	•
Alternator 28 V / 80 A	•	•	•	-
Additional alternator 14 V / 80 A to charge the leisure battery while driving	•	•	•	-
Upgrated alternator 28 V / 150 A including 2 x 45 A charging converter (for charging the leisure battery)	-	-	-	•
Fuel tank capacity	200 l	180 l	180 l	180 l
Air conditioning in driver's compartment	•	•	•	•
LED daytime running lights	•	•	•	•
Xenon headlights with washing System	•	•	•	•
Exclusive, ergonomic dashboard, incl. glove box	•	•	•	•
Leather dashboard covering upholstered with a stitched seam	•	•	•	•
Steering wheel with adjustable height and tilt	•	•	•	•
Warning triangle, first-aid kit, warning light and chock	•	•	•	•
Stainless-steel wheel trims	•	•	•	•







BODY LINER PLUS

Tinted, panoramic laminated glass windscreen with heated wiper support	•
Heated windscreen	•
Electric sun blind for driving	•
Tempered glass tinted sliding side windows with insulated glazing in the driver's compartment, with pleated shade blind	•
(can also be used as a sun shade while driving) and fly screen, thermally separated frame	
Double-glazed, tinted acrylic windows in living area, hinged or sliding, with pleated shade blinds and fly screen	•
Electrically-operated partially heated, insulated shutter for windshield	•
High-strength, durable aluminium composite construction Solidtherm	•
Thermal-bridge-free, fully insulated wall construction technology using high-density solid PU profiles	•
Fully insulated driver's compartment	•
Radiator between insulated shutter and windscreen	•
40 mm wall thickness, of which 38 mm closed-cell RTM hard foam	•
Walls, roof and under floor internally and externally in high-quality aluminium sandwich construction	•
Side walls in sheet smooth, stove enamelled white	•
Fully accessible roof	•
Aluminium roof moulding with rain channels to reduce staining of side walls	•
Front mask made of high stable, corrosion resistant fibreglass composite material	•
Side skirts made of high stable, corrosion resistant fibreglass composite material	•
Rear wall internal and external fascia in high-quality aluminum, sandwich construction with fiberglass facings	•
Heated raised floor with height of approx. 420 mm, accessible from outside via external lockers	•
Heavy duty rollers on rear chassis	•
Storage compartment flaps with cast aluminium hinges and low-maintenance, high-quality needle felt on the inside, thermally separated frame	•
Sandwich under floor and sandwich intermediate floor each with 40 mm or 30 mm thick RTM foam, floor insulation 70 mm in total	•
Rear-axle wheel arches in fully insulated sandwich construction	•







BODY LINER PLUS

Illuminated rear garage with garage doors left and right, (not car garage models) and lashing rails	•
Illuminated and heated internal entry step	•
External, electrically extendible and retractable entry step with safety circuit breaker and lighting	•
"Security Plus" entrance door with number combination security lock and emergency key operated switch, "Interstop" door security	•
Fly screen for entrance door	•
Outdoor lamp with safety circuit (automatic shut-off when engine is started)	•
Luxury swivel seats in driving area, with air suspension, lumbar support and heating	•
Front privacy screen (adjustable pull up sreen from the bottom upwards)	•
Rear garage floor with aluminum checker plate covering	•
Coach mirrors (long) with wide angle, electrically heated and adjustable	•
Coach windscreen wiper system	•







LIVING ROOM / BEDROOM AREA LINER PLUS

Furniture flaps and doors (veneered on both sides)	
• European Wenge	•
• Cherry Fineline	optional, no extra charge
Level living room floor from the dashboard to the rear bed	•
Wall and ceiling trim in colour-coordinated microfibre	•
Soft-walk floor covering. Colour: antia anthracite	•
Ergonomically-shaped seating group, in high-quality textile / microfibre upholstery with zippers (in cushions) incl. driver's compartment seats	•
High-quality sliding curtains	•
Multi-functional couch on the left with seat belt	•
Wardrobe with LED lighting	•
Rear bed with sprung base, adjustable headrest and comfortable cold foam mattress	•
Double-glazed panoramic skylight with light, fly screen and pleated shade blinding in living room	•
Mini-Heki with fly screen and pleated shade blind in bedroom area	•
High-quality living-room table	•
TV sideboard in entrance area	•
Display cabinet in entrance area with solid mineral material shelves incl. a range of glasses, with LED lighting	•
Light canopies with LED spotlights and indirect lighting with a high-quality, faux leather cover	•
Robust metal entrance handle for boarding assistance	•
1 x 12 V socket (living room) and 3 x 230 V sockets (1 x living room, 2 x bedroom area)	•
Wall covering with faux-leather cassettes for double / single beds in the rear of the vehicle (depending on floor plan)	•
Wrap round front wall cabinets above windscreen (not with pull-down bed option)	•

PULL-DOWN BED (OPTIONAL)

Bed Size (in mm)	2080 x 1440
Height above bed (in mm)	860
Comfortable cold-foam mattress with spring supports	•
Mini-Heki with fly screen and pleated shade blind	•







KITCHEN LINER PLUS

Kitchen area with splashguard	•
Mineral kitchen worktop with seamless moulded integrated sink. Colour: marble white	•
Stainless-steel three-flame hob with automatic ignition and glass cover	•
Single-lever chrome mixer tap with pullout sprinkler head	•
190 I refrigerator with separate 31 I freezer compartment, refrigerator with dark reflective front. AES (automatic and manual energy selection	•
12 V / 230 V / gas), 28 I gas oven with grill function	
Drawers with Servo-Soft closing	•
Integrated cutlery drawer	•
Roof fan with ventilation function	•
Light canopies with LED spotlights and indirect lighting	•
LED spotlights under the wall cupboards	•
Integrated waste bin system in kitchen base unit	•
2 x 230 V sockets	•
Exclusive kitchen corner cabinet, lowered	•

BATHROOM / TOILET

High-quality design chrome bathroom fittings on washstand	•
Mineral washstand panel with seamless moulded integrated washbasin. Colour: marble white	•
Separate shower with acrylic glass doors (in master bathroom) incl. removable clothes rail	•
Shower fittings with wall mounting and height adjustable shower head	•
Porcelain toilet with approx. 230 I fixed tank	•
Bathroom equipment with toilet paper holder, toilet brush, liquid soap dispenser, towel hook and rail, toothbrush glass	•
Toilet window	•
Mini-Heki with fly screen and pleated shade blind	•
Lighting with LED spotlights	•
Spacious wardrobe with LED lighting	•
Full-length mirror on sliding door	•
Spacious mirror wardrobe with backlit shelves	•
2 x 230 V sockets	•







WATER / GAS / HEATING LINER PLUS

Gas bottle compartment for 2 x 11 kg gas bottles	•
"Duocontrol" gas regulator with crash sensor and automatic bottle switching	•
Household siphons	•
Fresh-water and waste-water tank in heated raised floor, each approx. 320 l	•
Convenient waste-water-tank draining via drainage cock in heated raised floor	•
Top-mounted opening for cleaning all tanks, accessible from living area	•
Waste-water drain hose with quick lock and closing caps	•
Automatic, central pressurised water pump with filter system	•
Alde 5500 W hot-water and gas central heating with thermostatic control and timer, 230 V electric heating element, 3000 W,	•
duct shut-off with integrated hot water boiler to supply all taps	
Thermostatically controlled heating system in bedroom area / garage	•
2-zone underfloor heating, separately adjustable	•
2-zone room heating, separately adjustable (1 x living area + bathroom, 1 x bedroom area)	•
Heated towel rail in bathroom with room thermostat	•
Engine heat exchanger which uses engine coolant to heat the living area	•

ELECTRICAL / TV / RADIO

Gel batteries 2 x 170 Ah	•
Battery monitoring system with deep discharge protection	•
230 V CEE connection in storage space with cable routing through vehicle floor	•
Automatic residual current circuit-braker	•
Combination charging unit with inverter from 12 V to 230 V, sine 4000 W peak and 2000 W continuous output, with electric control and mains priority circuit,	•
maximum charging current 100 A	
Disconnection of on-board electrics when capacity limit is reached, with automatic reconnection	•
230 V socket in garage by the electrical center positioned in between floors	•
Double DIN radio with CD / DVD and MP3 and USB connection, with three-way speaker system	•
LED lighting in interior	•
Service-friendly access to on-board electronics with perforated plate housing in rear garage (in external storage compartment on the right for G models)	•
Automatic refrigerator switching from 12 V to gas / 230 V when engine is switched off (with mains connection)	•
Automatic charging of living room and vehicle batteries, charging maintenance during connection of external power and while driving	•
Cut-out switch for living-room batteries	•
Automatic connection and disconnection of living room and vehicle batteries	•







ON-BOARD ELECTRONICS LINER PLUS


a-modern, micro-processor-controlled on-board electronics with BUS (Binary Unit System) technology tral control panel with 7" touch screen colour display bet buttons for turning on and off the following devices: unel efforster for gas regulator (Eis-Ex)
tect buttons for turning on and off the following devices: In let of gas regulator (Eis-Ex)
are for gas regulator (Eis-Ex) splitting atter pump aste water tank (fill level in %) atter youtage of the vehicle battery and living room battery atternal power supply atte
are for gas regulator (Eis-Ex) splitting atter pump aste water tank (fill level in %) atter youtage of the vehicle battery and living room battery atternal power supply atte
efroster for gas regulator (Eis-Ex) ghting ater pump cetating display panel to monitor: estic tank (fill level in %) esh water tank (fill level in %) estery voltage of the vehicle battery and living room battery utdoor and indoor temperature external power supply as level (only in combination with gas tank) estery parallel circuit ate and time with alarm function estery systems for: aste water tank full esh water tank full es
sphting eating e
ater pump eating display panel to monitor: ptic tank (fill level in %) esh water tank (fill level in %) easte water tank (fill level in %) easte water tank (fill level in %) eattery voltage of the vehicle battery and living room battery utdoor and indoor temperature deternal power supply eas level (only in combination with gas tank) eattery parallel circuit eat eand time with alarm function rm systems for: aste water tank full esh care and time with full esh water tank full esh
eating display panel to monitor: eptic tank (fill level in %) esh water tank (fill level in %) esh water tank (fill level in %) este water tank full esh water tan
display panel to monitor: septic tank (fill level in %) esh water tank (fill level in %) aste water tank (fill level in %) aste water tank (fill level in %) attery voltage of the vehicle battery and living room battery stetral power supply as level (only in combination with gas tank) astery parallel circuit attery parallel circuit atter and time with alarm function sterm systems for: aste water tank full esh water tank empty eptic tank full especies as the water tank empty especies as t
eptic tank (fill level in %) esh water tank (fill level in %) esh water tank (fill level in %) est teny voltage of the vehicle battery and living room battery external power supply est level (only in combination with gas tank) est ear and time with alarm function erm systems for: laste water tank full esh water tank full e
eptic tank (fill level in %) esh water tank (fill level in %) esh water tank (fill level in %) est teny voltage of the vehicle battery and living room battery external power supply est level (only in combination with gas tank) est ear and time with alarm function erm systems for: laste water tank full esh water tank full e
aste water tank (fill level in %) attery voltage of the vehicle battery and living room battery utdoor and indoor temperature cternal power supply as level (only in combination with gas tank) attery parallel circuit attery parallel circuit aste and time with alarm function aste water tank full aste water tank full esh water tank empty eptic tank full est tank full
enter y voltage of the vehicle battery and living room battery utdoor and indoor temperature utdoor and indoor and
utdoor and indoor temperature kternal power supply as level (only in combination with gas tank) attery parallel circuit atter and time with alarm function rm systems for: laste water tank full esh water tank empty expectic tank full expect
ternal power supply as level (only in combination with gas tank) attery parallel circuit atte and time with alarm function rm systems for: aste water tank full esh water tank empty eptic tank full exercises to supply
es level (only in combination with gas tank) attery parallel circuit atte and time with alarm function rm systems for: aste water tank full esh water tank empty eptic tank full expectic tank full
ettery parallel circuit ate and time with alarm function rm systems for: laste water tank full esh water tank empty eptic tank full extended the systems for: extended the systems f
ente and time with alarm function rm systems for: laste water tank full esh water tank empty eptic tank full enter tank full
rm systems for: laste water tank full esh water tank empty eptic tank full •
esh water tank full eptic tank full • • • • • • • • • • • •
esh water tank full eptic tank full • • • • • • • • • • • •
esh water tank empty eptic tank full •
eptic tank full
ettery under-voltage
eserve gas bottle in operation
• extended step
tery computer:
eisure battery capacity indicator
narging and discharging current •








LINER PLUS 940 LS



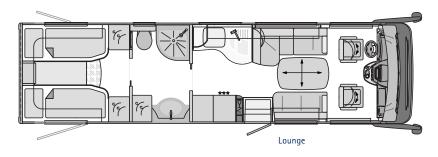


Base vehicle	lveco Eurocargo	MAN TGL	MB Atego
Chassis type	90E25	8.220 TipMatic	923 L
Engine	6 cylinder	4 cylinder	4 cylinder
Engine capacity	6.7	4.6 l	5.1 l
Output	184 kW (250 bhp)	162 kW (220 bhp)	170 kW (231 bhp)
Torque	850 Nm	850 Nm	900 Nm
Overall length (mm)	9500	9500	9500
Overall width (mm)	2480	2480	2480
Overall height (mm)	3560	3560	3630
Wheelbase (mm)	4815	4850	4820
Gross vehicle weight ratio (kg)	9000	8800	9500
Mass in running order(kg)	7470	7170	7690
Payload (kg)	1530	1630	1810
Towbar load (kg)	3500	3500	3500
Seats with three-point seatbelt in multi-function / CL lounge / bar version	3 / 4 / 4	3 / 4 / 4	3 / 4 / 4
Bench seat left (CL lounge, mm)	1850 / 915	1850 / 915	1850 / 915
Bench seat right (mm)	1360 / 650	1360 / 650	1360 / 650
Rear bed (mm)	2x 2000 / 850	2 x 2000 / 850	2 x 2000 / 850
Pull-down bed dimensions (optional, mm)	2080 / 1440	2080 / 1440	2080 / 1440
Height above pull-down bed (mm)	860	860	860
Garage door right H / W (mm)	1250 / 1150	1250 / 1150	1250 / 1150
Garage door left H / W (mm)	1250 / 800	1250 / 800	1250 / 800


For further information concerning measurements and weight specifications see page 22.

07.08.14 17:16



LINER PLUS 940 M



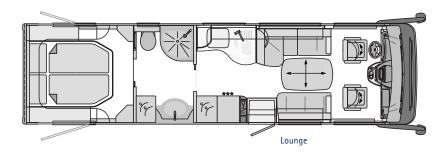

Base vehicle	Iveco Eurocargo	MAN TGL	MB Atego
Chassis type	90E25	8.220 TipMatic	923 L
Engine	6 cylinder	4 cylinder	4 cylinder
Engine capacity	6.7 l	4.6	5.1 l
Output	184 kW (250 bhp)	162 kW (220 bhp)	170 kW (231 bhp)
Torque	850 Nm	850 Nm	900 Nm
Overall length (mm)	9500	9500	9500
Overall width (mm)	2480	2480	2480
Overall height (mm)	3560	3560	3630
Wheelbase (mm)	4815	4850	4820
Gross vehicle weight ratio (kg)	9000	8800	9500
Mass in running order (kg)	7470	7170	7690
Payload (kg)	1530	1630	1810
Towbar load (kg)	3500	3500	3500
Seats with three-point seatbelt in multi-function / CL lounge / bar version	3 / 4 / 4	3 / 4 / 4	3 / 4 / 4
Bench seat left (CL lounge, mm)	1850 / 915	1850 / 915	1850 / 915
Bench seat right (mm)	1360 / 650	1360 / 650	1360 / 650
Rear bed (mm)	2000 / 1570	2000 / 1570	2000 / 1570
Pull-down bed dimensions (optional, mm)	2080 / 1440	2080 / 1440	2080 / 1440
Height above pull-down bed (mm)	860	860	860
Garage door right H / W (mm)	1250 / 1150	1250 / 1150	1250 / 1150
Garage door left H / W (mm)	1250 / 800	1250 / 800	1250 / 800


For further information concerning measurements and weight specifications see page 22.






07.08.14 17:16

LINER PLUS 995 M



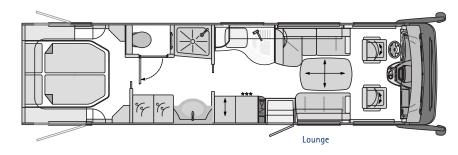

Base vehicle	Iveco Eurocargo	MAN TGL	MB Atego
Chassis type	120E28	12.250 TipMatic	1230 L
Engine	6 cylinder	6 cylinder	6 cylinder
Engine capacity	6.7 l	6.9 l	7.7
Output	206 kW (280 bhp)	184 kW (250 bhp)	220 kW (299 bhp)
Torque	1000 Nm	1000 Nm	1200 Nm
Overall length (mm)	10000	10000	10000
Overall width (mm)	2480	2480	2480
Overall height (mm)	3690	3550	3720
Wheelbase (mm)	5175	5200	5060
Gross vehicle weight ratio (kg)	11990	11990	11990
Mass in running order (kg)	8420	7970	8740
Payload (kg)	3570	4020	3250
Towbar load (kg)	3000	3000	3000
Seats with three-point seatbelt in multi-function / CL lounge / bar version	3 / 4 / 4	3 / 4 / 4	3 / 4 / 4
Bench seat left (CL lounge, mm)	1850 / 915	1850 / 915	1850 / 915
Bench seat right (mm)	1360 / 650	1360 / 650	1360 / 650
Rear bed (mm)	2000 / 1570	2000 / 1570	2000 / 1570
Pull-down bed dimensions (optional, mm)	2080 / 1440	2080 / 1440	2080 / 1440
Height above pull-down bed (mm)	860	860	860
Garage door right H / W (mm)	1250 / 1150	1250 / 1150	1250 / 1150
Garage door left H / W (mm)	1250 / 800	1250 / 800	1250 / 800


For further information concerning measurements and weight specifications see page 22.


CONCORDE REISEMOBILE AUS LEIDENSCHAFT

44800702 PL_2014_LinerPlus_GB_final.indd 11



LINER PLUS 990 L



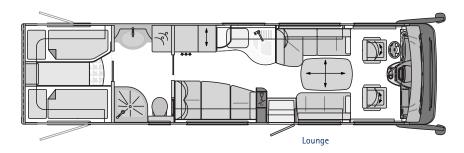


Base vehicle	Iveco Eurocargo	MAN TGL	MB Atego
Chassis type	120E28	12.250 TipMatic	1230 L
Engine	6 cylinder	6 cylinder	6 cylinder
Engine capacity	6.7	6.9	7.7
Output	206 kW (280 bhp)	184 kW (250 bhp)	220 kW (299 bhp)
Torque	1000 Nm	1000 Nm	1200 Nm
Overall length (mm)	10000	10000	10000
Overall width (mm)	2480	2480	2480
Overall height (mm)	3650	3550	3720
Wheelbase (mm)	5175	5200	5060
Gross vehicle weight ratio (kg)	11990	11990	11990
Mass in running order (kg)	8520	8070	8840
Payload (kg)	3470	3920	3150
Towbar load (kg)	3000	3000	3000
Seats with three-point seatbelt in multi-function / CL lounge / bar version	5/6/6	5/6/6	5/6/6
Bench seat left (CL lounge, mm)	1850 / 915	1850 / 915	1850 / 915
Bench seat right (mm)	1360 / 650	1360 / 650	1360 / 650
Rear bed (mm)	2 x 2000 / 850	2x2000 / 850	2x2000 / 850
Pull-down bed dimensions (optional, mm)	2080 / 1440	2080 / 1440	2080 / 1440
Height above pull-down bed (mm)	860	860	860
Garage door right H / W (mm)	1250 / 1150	1250 / 1150	1250 / 1150
Garage door left H / W (mm)	1250 / 800	1250 / 800	1250 / 800


For further information concerning measurements and weight specifications see page 22.





LINER PLUS 990 G



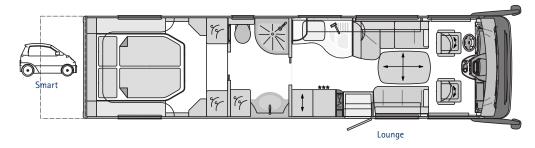



Base vehicle	Iveco Eurocargo	MAN TGL	MB Atego
Chassis type	120E28	12.250 TipMatic	1230 L
Engine	6 cylinder	6 cylinder	6 cylinder
Engine capacity	6.7	6.9 l	7.7
Output	206 kW (280 bhp)	184 kW (250 bhp)	220 kW (299 bhp)
Torque	1000 Nm	1000 Nm	1200 Nm
Overall length (mm)	10155	10155	10155
Overall width (mm)	2480	2480	2480
Overall height (mm)	3690	3550	3720
Wheelbase (mm)	5175	5200	5060
Gross vehicle weight ratio (kg)	11990	11990	11990
Mass in running order (kg)	8580	8130	8900
Payload (kg)	3410	3860	3090
Towbar load (kg)	3000	3000	3000
Seats with three-point seatbelt in multi-function / CL lounge / bar version	3 / 4 / 4	3 / 4 / 4	3 / 4 / 4
Bench seat left (CL lounge, mm)	1850 / 915	1850 / 915	1850 / 915
Bench seat right (mm)	1360 / 650	1360 / 650	1360 / 650
Rear bed (mm)	2000 / 1570	2000 / 1570	2000 / 1570
Pull-down bed dimensions (optional, mm)	2080 / 1440	2080 / 1440	2080 / 1440
Height above pull-down bed (mm)	860	860	860
Rear flap H / W (mm)	1610 / 2100	1610 / 2100	1610 / 2100

For further information concerning measurements and weight specifications see page 22.



LINER PLUS 1060 GMAX



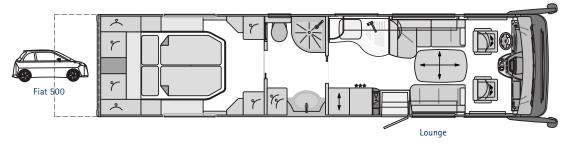

Base vehicle	MAN TGM	MB Atego
Chassis type	15.290	1530 L
Engine Engine	6 cylinder	6 cylinder
Engine capacity	6.9	7.7
Output	213 kW (290 bhp)	220 kW (299 bhp)
Torque	1150 Nm	1200 Nm
Overall length (mm)	10700	10700
Overall width (mm)	2480	2480
Overall height (mm)	3680	3730
Wheelbase (mm)	5425	5360
Gross vehicle weight ratio (kg)	15000	15000
Mass in running order (kg)	9390	9170
Payload (kg)	5610	5830
Towbar load (kg)	3000	3000
Seats with three-point seatbelt in multi-function / CL lounge / bar version	3 / 4 / 4	3 / 4 / 4
Bench seat left (CL lounge, mm)	1850 / 915	1850 / 915
Bench seat right (mm)	1360 / 650	1360 / 650
Rear bed (mm)	2000 / 1570	2000 / 1570
Pull-down bed dimensions (optional, mm)	2080 / 1440	2080 / 1440
Height above pull-down bed (mm)	860	860
Rear flap H / W (mm)	1610 / 2100	1610 / 2100

For further information concerning measurements and weight specifications see page 22.









15

LINER PLUS 1090 MS



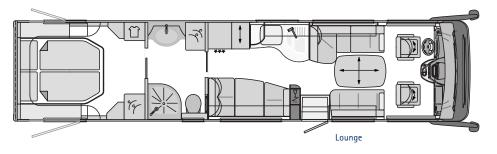



Base vehicle	Iveco Eurocargo	MAN TGL	MB Atego
Chassis type	120E28	12.250 TipMatic	1230 L
Engine	6 cylinder	6 cylinder	6 cylinder
Engine capacity	6.7	6.9	7.7
Output	206 kW (280 bhp)	184 kW (250 bhp)	220 kW (299 bhp)
Torque	1000 Nm	1000 Nm	1200 Nm
Overall length (mm)	11000	11000	11000
Overall width (mm)	2480	2480	2480
Overall height (mm)	3690	3550	3720
Wheelbase (mm)	5670	5700	5660
Gross vehicle weight ratio (kg)	11990	11990	11990
Mass in running order (kg)	8820	8370	9140
Payload (kg)	3170	3620	2850
Towbar load (kg)	3000	3000	3000
Seats with three-point seatbelt in multi-function / CL lounge / bar version	5/6/6	5/6/6	5/6/6
Bench seat left (CL lounge, mm)	1850 / 915	1850 / 915	1850 / 915
Bench seat right (mm)	1360 / 650	1360 / 650	1360 / 650
Dinette	1960 / 920	1960 / 920	1960 / 920
Rear bed (mm)	2000 / 1570	2000 / 1570	2000 / 1570
Pull-down bed dimensions (optional, mm)	2080 / 1440	2080 / 1440	2080 / 1440
Height above pull-down bed (mm)	860	860	860
Garage door right H / W (mm)	1250 / 1150	1250 / 1150	1250 / 1150
Garage door left H / W (mm)	1250 / 800	1250 / 800	1250 / 800

For further information concerning measurements and weight specifications see page 22.



LINER PLUS 1130 GMAX



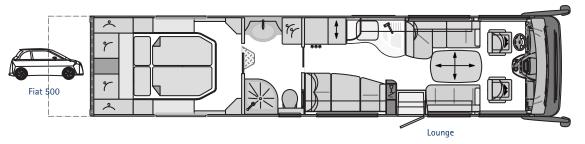

Base vehicle	MAN TGM	MB Atego
Chassis type	15.290	1530 L
Engine	6 cylinder	6 cylinder
Engine capacity	6.9	7.7
Output	213 kW (290 bhp)	220 kW (299 bhp)
Torque	1150 Nm	1200 Nm
Overall length (mm)	11400	11400
Overall width (mm)	2480	2480
Overall height (mm)	3680	3730
Wheelbase (mm)	5775	5860
Gross vehicle weight ratio (kg)	15000	15000
Mass in running order (kg)	9570	9350
Payload (kg)	5430	5650
Towbar load (kg)	3000	3000
Seats with three-point seatbelt in multi-function / CL lounge / bar version	5/6/6	5/6/6
Bench seat left (CL lounge, mm)	1850 / 915	1850 / 915
Bench seat right (mm)	1360 / 650	1360 / 650
Dinette	1960 / 920	1960 / 920
Rear bed (mm)	2000 / 1570	2000 / 1570
Pull-down bed dimensions (optional, mm)	2080 / 1440	2080 / 1440
Height above pull-down bed (mm)	860	860
Rear flap H / W (mm)	1610 / 2100	1610 / 2100

For further information concerning measurements and weight specifications see page 22.







17

07.08.14 17:16

LINER PLUS 1140 G UNIVERSAL



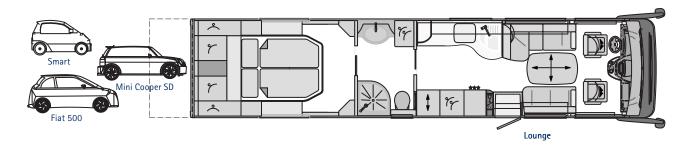

Chassis type 15.290 1530 L Engine 6 cylinder 6 cylinder Engine capacity 6.91 7.71 Output 213 kW (290 bhp) 220 kW (299 bhp) Torque 1150 Nm 1200 Nm Overall length (mm) 11415 11415 Overall width (mm) 2480 2480 Overall height (mm) 3680 3730 Wheelbase (mm) 5875 5960 Gross vehicle weight ratio (kg) 15000 15000 Mass in running order (kg) 9620 9400 Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 1960 / 920 Rear bed (mm) 2080 / 1440 2080 / 1440 2080 / 1440 Height above pull-down	Base vehicle	MAN TGM	MB Atego
Engine capacity 6.9 l 7.7 l Output 213 kW (290 bhp) 220 kW (299 bhp) Torque 1150 Nm 1200 Nm Overall length (mm) 11415 11415 Overall width (mm) 2480 2480 Overall height (mm) 3680 3730 Overall height (mm) 5875 5960 Gross vehicle weight ratio (kg) 15000 15000 Mass in running order (kg) 9620 9400 Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Chassis type	15.290	1530 L
Output 213 kW (290 bhp) 220 kW (299 bhp) Torque 1150 Nm 1200 Nm Overall length (mm) 11415 11415 Overall width (mm) 2480 2480 Overall height (mm) 3680 3730 Wheelbase (mm) 5875 5960 Gross vehicle weight ratio (kg) 15000 15000 Mass in running order (kg) 9620 9400 Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Engine	6 cylinder	6 cylinder
Torque 1150 Nm 1200 Nm Overall length (mm) 11415 11415 Overall width (mm) 2480 2480 Overall height (mm) 3680 3730 Wheelbase (mm) 5875 5960 Gross vehicle weight ratio (kg) 15000 15000 Mass in running order (kg) 9620 9400 Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed (imensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Engine capacity	6.9	7.7
Overall length (mm) 11415 11415 Overall width (mm) 2480 2480 Overall height (mm) 3680 3730 Wheelbase (mm) 5875 5960 Gross vehicle weight ratio (kg) 15000 15000 Mass in running order (kg) 9620 9400 Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Output	213 kW (290 bhp)	220 kW (299 bhp)
Overall width (mm) 2480 2480 Overall height (mm) 3680 3730 Wheelbase (mm) 5875 5960 Gross vehicle weight ratio (kg) 15000 15000 Mass in running order (kg) 9620 9400 Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Torque	1150 Nm	1200 Nm
Overall height (mm) 3680 3730 Wheelbase (mm) 5875 5960 Gross vehicle weight ratio (kg) 15000 15000 Mass in running order (kg) 9620 9400 Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Overall length (mm)	11415	11415
Wheelbase (mm) 5875 5960 Gross vehicle weight ratio (kg) 15000 15000 Mass in running order (kg) 9620 9400 Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Overall width (mm)	2480	2480
Gross vehicle weight ratio (kg) 15000 15000 Mass in running order (kg) 9620 9400 Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Overall height (mm)	3680	3730
Mass in running order (kg) 9620 9400 Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Wheelbase (mm)	5875	5960
Payload (kg) 5380 5600 Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Gross vehicle weight ratio (kg)	15000	15000
Towbar load (kg) 3000 3000 Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Mass in running order (kg)	9620	9400
Seats with three-point seatbelt in multi-function / CL lounge / bar version 5 / 6 / 6 Bench seat left (CL lounge, mm) 1850 / 915 Bench seat right (mm) 1360 / 650 Dinette 1960 / 920 Rear bed (mm) 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 Height above pull-down bed (mm) 860	Payload (kg)	5380	5600
Bench seat left (CL lounge, mm) 1850 / 915 1850 / 915 Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Towbar load (kg)	3000	3000
Bench seat right (mm) 1360 / 650 1360 / 650 Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Seats with three-point seatbelt in multi-function / CL lounge / bar version	5/6/6	5/6/6
Dinette 1960 / 920 1960 / 920 Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Bench seat left (CL lounge, mm)	1850 / 915	1850 / 915
Rear bed (mm) 2000 / 1570 2000 / 1570 Pull-down bed dimensions (optional, mm) 2080 / 1440 2080 / 1440 Height above pull-down bed (mm) 860 860	Bench seat right (mm)	1360 / 650	1360 / 650
Pull-down bed dimensions (optional, mm) Height above pull-down bed (mm) 2080 / 1440 860 860	Dinette	1960 / 920	1960 / 920
Height above pull-down bed (mm) 860 860	Rear bed (mm)	2000 / 1570	2000 / 1570
	Pull-down bed dimensions (optional, mm)	2080 / 1440	2080 / 1440
Rear flap H / W (mm) 1610 / 2100 1610 / 2100	Height above pull-down bed (mm)	860	860
1 , , ,	Rear flap H / W (mm)	1610 / 2100	1610 / 2100

For further information concerning measurements and weight specifications see page 22.

CONCORDE REISEMOBILE AUS LEIDENSCHAFT

44800702 PL_2014_LinerPlus_GB_final.indd 17



Chassis optional equipment

Artikel no.	CHASSIS IVECO EUROCARGO	ADDITIONAL WEIGHT in kg
700511-15	Tow bar coupling with 3500 kg tow bar load (3000 kg above 10 t) (only available factory-fitted)	29
700097-15	Hydraulic stabiliser jack system with automatic leveling	139
703413-15	Concorde leather-covered steering wheel	1
7060375-15	Concorde multi-function leather-covered steering wheel (only for operating Radio system incl. mobile phones equipment)	3
709273-15	Chassis variant 12000 kg	800
	lveco Eurocargo 120E28 (6 cylinder, 6.7 l, 206 kW (280 bhp) 1000 Nm, height 3690 mm, tow bar load 3000 kg)	
	Chassis with 19.5" tyres	
	available for 940 M, 940 LS	
105080-15	Dual pressure air horn	3

CHASSIS MAN

700511-15	Tow bar coupling with 3500 kg tow bar load (3000 kg above 10 t) (only available factory-fitted)	29
700097-15	Hydraulic stabiliser jack system with automatic leveling	139
700098-15	Hydraulic stabiliser jack system with automatic leveling (G-models)	139
7005011-15	17.5" alloy wheel rims with standard tyres (MAN TGL) "Alcoa Dura Bright" (Spare wheel steel rim)	-56
702227-15	19.5" alloy wheel rims with standard tyres (MAN TGM) "Alcoa Dura Bright" (Spare wheel steel rim)	-90
703409-15	Concorde leather-covered steering wheel	1
703410-15	Concorde multi-function leather-covered steering wheel (only for operating Radio system incl. mobile phones equipment)	3
709213-15	Engine variant 8.250 (6 cylinder, 6.9 l, 184 / 250 kW / bhp, 1000 Nm, tow bar load 3000 kg) available for: 940 M, 940 LS	435
709271-15	Chassis variant 12000 kg	650
	MAN TGL 12.250 TipMatic (6 cylinder, 6.9 l, 184 / 250 kW / bhp, 1000 Nm, tow bar load 3000 kg)	
	instead of 8.220	
	available for: 940 M, 940 LS	
709272-15	Chassis variant 15000 kg	1080
	MAN TGM 15.290	
	(6 cylinder, 6.9 l, 213 / 290 kW / bhp, 1150 Nm, height 3680 mm, wheelbase 5075 at 995 M, 990 L/G)	
	instead of 12.250	
	Chassis with 19.5" tyres	
	air suspension front axle	
	available for: 995 M, 990 L, 990 G, 1090 MS	
105080-15	Dual pressure air horn	3







Chassis optional equipment

Artikel no.	CHASSIS MERCEDES BENZ ATEGO	ADDITIONAL WEIGHT in kg
700511-15	Towbar coupling with 3500 kg tow bar load (3000 kg above 10 t) (only available factory-fitted)	29
700097-15	Hydraulic stabiliser jack system with automatic leveling	139
700098-15	Hydraulic stabiliser jack system with automatic leveling (G-models)	139
7005012-15	6.75 x 17.5" "Alcoa Dura bright" alloy wheel rims with standard tyres (spare wheel steel rim) (MB Atego 923 L)	-56
7005016-15	6.75 x 19.5" "Daewoo" alloy wheel rims with standard tyres (spare wheel steel rim) (MB Atego 1230 L)	-60
7005017-15	7.5 x 19.5" "Alcoa Dura bright" alloy wheel rims with standard tyres (spare wheel steel rim) (MB Atego 1530 L)	-60
703405-15	Original MB leather steering wheel with real chrome trim	3
703425-15	Original MB leather steering wheel with real wood trim	3
709179-15	Engine variant 924 (6 cylinder, 7.2 l, 175 / 238 kW / bhp, 1000 Nm) available for: 940 M, 940 LS	180
709181-15	Chassis variant 12000 kg	900
	1230 L (6 cylinder, 7.7 l, 220 / 299 kW / bhp, 1200 Nm, height 3720 mm, wheelbase 4760 mm, towbar load 3000 kg) instead of 923 L	
	Chassis with 19.5" tyres	
	air suspension front axle	
	available for: 940 M, 940 LS	
709182-15	Chassis variant 15000 kg	90
	1530 L (6 cylinder, 7.7 l, 220 / 299 kW / bhp, 1200 Nm, height 3730 mm, wheelbase 5060 mm at 995 M, 990 L, 990 G) instead of 1230 L	
	Chassis with 19.5" tyres	
	air suspension front axle	
	available for: 995 M, 990 L, 990 G, 1090 MS	
105080-15	Dual pressure air horn	3







Body optional equipment

Artikel no.	BODY	ADDITIONAL WEIGHT in kg
700141-15	Electric 2 x 4 m roof awning, from 1060	84
700143-15	Electric 6.0 m roof awning (940 LS / M, 990 G / L, 995 M)	66
701203-15	LED-roof lighting, drivers and passenger side, individually switched	3
7062290-15	Central locking for storage compartment flaps (excluding skirting side-flaps and gas storage door)	5
700175-15	Thermo insulated windows in cockpit, side windows electrically operated	3

LIVING ROOM / BEDROOM AREA

833515	CL lounge with side couch	24
831115	Bar version with adjustable individual seat and multi-function bench	46
704498-15	Mechanically-operated pull-down bed with sprung base instead of front wall cupboards above cab	45
7044981-15	Electrically-operated pull-down bed with sprung base instead of front wall cupboards above cab	53
7015541-15	Height-adjustable living room table with cushions for extra berth (not in bar version)	8
701551-15	Dinettes table height adjustable (for 990 L, 1090 MS, 1130 GMAX, 1140 G UNIVERSAL)	8
700754-15	Midi-Heki instead of Mini-Heki (bedroom area)	6
700752-15	Panorama skylight instead Mini-Heki (bedroom area)	19
700812-15	Cabinet fronts in high gloss Senosan cream white, commercial floor covering in "Yacht" flooring effect	0

KITCHEN

700436-15	Stainless-steel microwave with grill function under hob, 230 V operation via mains connection, 26 I oven	22
	(not in conjunction with dishwasher)	
701899-15	Dishwasher under hob (not in conjunction with microwave)	25







Body optional equipment

Artikel no.	ELECTRICAL	ADDITIONAL WEIGHT in kg
700743-15	Electrical power package	60
	1 x additional gel battery 170 Ah (total of 3 batteries) 100 A combination charger, sinus inverter from 12 V to 230 V,	
	5000 W peak and 2500 W continuous output with mains failure compensation	
701200-15	Alarm system with surveillance of the interior, garage doors as well as the living room door	3
700853-15	Built-in 2600 W gas generator (only in conjunction with gas tank)	50
700684-15	Dual lense reversing camera with shutter (image via standard radio)	4
700720-15	Solar unit with approx. 120 W maximum output	15
700722-15	Solar unit with approx. 2 x 120 W maximum output	30

TV / RADIO / TELEPHONE

	Satellite TV set with 85 cm dish, fully-automatic alignment, multi-user equipment with TWIN LNB,	
	connection for second receiver with 12 V / 230 V and antenna socket in bedroom area, sound via radio	
	(overall vehicle height plus approx. 100 mm):	
700560-15	Satellite TV set 1 with 24" LED flat screen in entrance area (940 LS, 940 M, 995 M, 990 G, 1060 GMAX, 1140 G UNIVERSAL)	38
700561-15	Satellite TV set 1 with 24" LED flat screen in entrance area (990 L, 1090 MS and 1130 GMAX)	38
700567-15	Satellite TV set 2 with 24" LED flat screen in right overhead cupboard, electrically height-adjustable	45
700566-15	Satellite TV set 2 with 24" LED flat screen in right overhead cupboard, electrically height-adjustable (G-models)	45
700564-15	Satellite TV set 3 with 24" LED flat screen in overhead cupboard above windscreen, electrically height-adjustable (not in conjunction with pull-down bed)	45
700576-15	Internet satellite TV set with 24" LED flat screen in entrance area, system with TV reception function,	38
	GPS SKEW and Internet access	
7006051-15	Navigation system (with truck software and 7" touch screen, integrated radio with DVD,	
	CD and MP3 playback, hands-free device for telephone with Bluetooth) and dual reversing camera with shutter	4
7005922-15	Sound system with three-way speaker in driver's compartement, vehicle-specific frequency crossover, two-way speaker in living room,	25
	double-bass reflex subwoofer, sound processor	
700573-15	22" LED flat-screen for rear bedroom area with integrated TV tuner	15
7005102-15	Combination 230 V / 12 V / antenna / socket with floor inlet, position: in external storage compartement on the left next to body door	1
	(for optional external TV connection) (satellite output)	
700677-15	DVB-T external antenna for reception of terrestrial digial TV (for two TV sets)	2
706346-15	DAB + Digital radio, premium quality sound system with additional added features	3







Body optional equipment

Artikel no.	WATER / GAS / HEATING	ADDITIONAL WEIGHT in kg
700412-15	External shower in the garage (driver's side)	2
700863-15	"Motor Caravan" diesel block heater with convenient permanent heating function (5200 W) incl. timer	10
700898-15	Gas alarm for monitoring living room (carbon monoxide, propane, butane, narcotic gas)	2
7008901-15	Approx. 120 I gas tank with remote gas switch, crash sensor and level indicator on control panel display and skirting-panel flap	104
700401-15	External wall gas socket on passenger side (BBQ point)	1
700830-15	Roof mounted air-conditioning 2400 W unit with 1700 W heating element (overall vehicle height increases 130 mm)	34
700832-15	2400 W air conditioning unit located in double floor with infrared remote control	37
700836-15	2 x 2400 W air conditioning units for living room and bedroom area / bathroom with infrared remote control	74
	(fitted in double floor) (only from model 990 upwards)	
7018111-15	SOG-up toilet ventilation over the roof with fixed tank (extracted direct from toilet bowl)	1

UPHOLSTERY / LEATHER / CARPET

809250-15	Textile / microfibre upholstery "Cream", ribbed optic	standard 0
809251-15	Textile / microfibre upholstery "Caramel", ribbed optic	standard 0
809234-15	Leather upholstery "Mother of pearl", ribbed optic	25
809235-15	Leather upholstery "Savanna", ribbed optic	25
809236-15	Leather upholstery "Stone", ribbed optic	25
809213-15	Exclusive leather upholstery "Rustic Grey"	25
	(Natural material with visual inclusions and different surface optics possible)	
835545-15	Kitchen dinette leather upholstery (only in conjunction with leather upholstery)	15
870100-15	Upholstery textile / microfibre with "Redonda" Foam-optic	0
870000-15	Upholstery leather with "Redonda" foam-optic	0
860000-15	Concorde collection: 2 x small scatter cushions, 1 x large scatter cushion, 2 x blankets	8
700112-15	Soft-walk floor covering. Colour: "Yacht" flooring effect	0
7001553C-15	Living room carpet linked and removable. Colour: cream	10
7001553G-15	Living room carpet linked and removable. Colour: grey-brown	10
7001553B-15	Living room carpet linked and remobable. Colour: beige (high pile)	10

Concorde only uses high-quality materials an leather with a special dirt-repellent coating.


The mass in running order consists of the dry weight with standard equipment plus: driver (75 kg), full fuel tank, 100 l fresh water in driving position, 1 x full 11 kg steel gas bottle, tool kit and spare wheel. Installing optional extras and accessories may alter the unladen weight and dimensions. All dimensions and weights correspond to the information available at the time of printing. Deviations of +/- 5% are possible and permitted.

•

Sectional drawing

CONCORDE LINER PLUS CABIN CONSTRUCTION

In motorhome construction, Concorde stands for perfect insulation and outstanding stability. This is primarily down to the lack of thermal loss, completely sealed solid-therm cabin construction with polyurethane ridged foam ledges as well as the insulation of the side walls with 38 millimeter strong RTM foam. If that was not enough, the under and in-between floors are finished in a sandwich type construction and filled with a total of 70 millimeters of insulation. The side skirt panels, bumpers as well as the front mask and rear parts are made from highly stable and nonetheless elastic fiberglass composite material. The very glossy and flush wall surfaces made from aluminium sandwich construction. Aluminium roof profile ledges with rainwater drainage channels to reduce sidewall staining. 10-year water ingress warranty on the body against water ingress from the outside (subject to annual inspection in accordance with the Concorde warranty conditions).

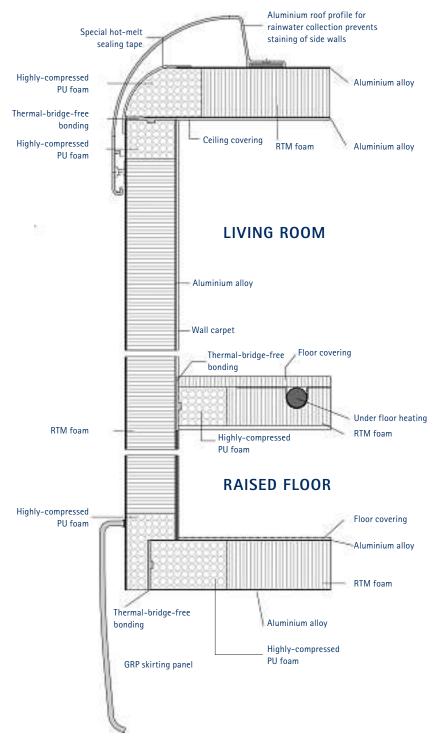





Technical modifications reserved provided that the overall product quality remains the same or is improved and the intended purpose is not impaired. On publication of this technical information, all previous are rendered invalid. Subject to change without notice, errors excepted.



Concorde Reisemobile GmbH

Concorde-Straße 2-4, D-96132 Schlüsselfeld-Aschbach

Tel.: +49 (0) 9555 9225-0, Fax: +49 (0) 9555 9225-44

Web: www.concorde.eu, E-Mail: info@concorde.eu